




## Freezer rooms

### VC04 Freezer unit

Ready-for-use mobile freezer unit with a volume of 20 m<sup>3</sup> and a large freezing overcapacity (temperature range down to minus 30 °C\*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

## Technical specifications VC04

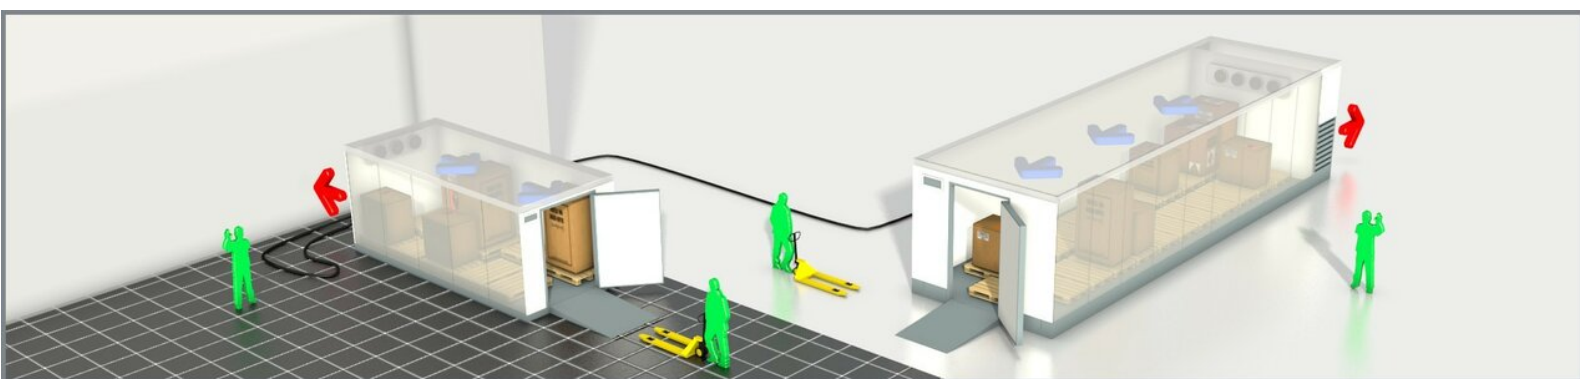

|                                      |                   |                   |            |                       |                       |
|--------------------------------------|-------------------|-------------------|------------|-----------------------|-----------------------|
| Amount of pallets (euro)             | 5                 | Current (nominal) | 4.8 A      | Height (internal)     | 2260 mm               |
| Volume                               | 20 m <sup>3</sup> | Recommended fuses | 16 A       | Door height           | 2100 mm               |
| Min. inside temperature <sup>1</sup> | -30 °C            | Phases            | 3 + N + PE | Door width            | 900 mm                |
| Max. inside temperature              | -15 °C            | Length (external) | 4000 mm    | Threshold height      | 160 mm                |
| Min. outside temperature             | -20 °C            | Width (external)  | 2500 mm    | Max. load             | 420 Kg/m <sup>2</sup> |
| Power connection                     | 16 A CEE          | Height (external) | 2500 mm    | Weight                | 1350 kg               |
| Voltage                              | 400 V             | Length (internal) | 3840 mm    | Sound level (at 10 m) | 48 dB(A)              |
| Current (max)                        | 6.9 A             | Width (internal)  | 2340 mm    |                       |                       |

<sup>1</sup> After approval of Coolworld International